




The lightweight, high volume front loader that delivers higher net payloads with increased speed, reliability and proven performance of a Pak-Mor.

## **GENERAL SPECIFICATIONS**

MODEL	CAP	ACITY	OVERALL LENGTH (OL-ARMS DOWN)		OVERALL LENGTH (OL-ARMS UP)		BODY LENGTH (BL)		CG-BODY (CG-B)		CG-PAYLOAD (CG-P)		BODY WEIGHT	
	yd <sup>3</sup>	m³	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kgs
FPE830C	30	23	372	9449	318	8077	208	5283	78	1981	150	3810	16700	7575
FPE835C	35	27	384	9754	330	8382	220	5588	80	2032	155	3937	17260	7829
FPE840C	40	31	432	10973	378	9601	268	6807	85	2159	170	4318	18500	8392

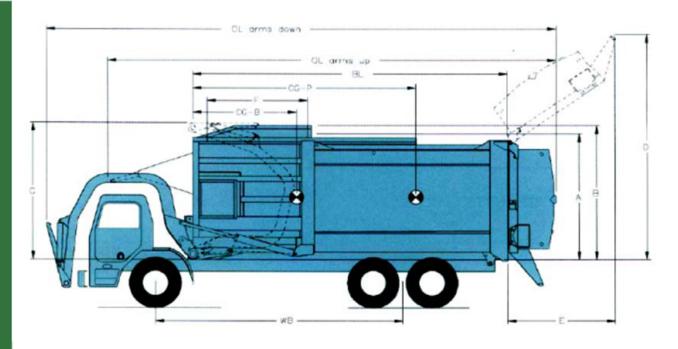

## DIMENSIONAL SPECIFICATIONS

SYMBOL	DESCRIPTION	DIMENSIONS		
STIVIBUL	DESCRIPTION	in	mm	
A	Body Height	110	2794	
В	Body Height - With Optional Windscreen	118	2997	
С	Body Height - With Arms Up	119	3023	
D	Height of Rear Door - Elevated Position	197	5004	
E	End of Body to End of Rear Door - Elevated	91	2311	
F	Hopper Opening Length	86	2184	
-	Body Width Including Lift Arms	96	2438	

# Pak-Mor Ltd.

P.O. Box 389 Seguin, TX 78156 Tel 830-303-7256 Fax 830-303-3648

info@pakmor.com www.pakmor.com

The products illustrated in this catalog are protected by United States and foreign patents, patents pending, and patents applied for. Illustrations and specifications are not binding as Pak-Mor reserves the right under the company's product development program to change the design or construction details and to furnish equipment when thus altered without reference to illustrations or specifications presented herein and supersede all previously published information. JAN 2010






# **BODY & CONSTRUCTION SPECIFICATIONS**

Body Sides (80k)	10 ga	3.41 mm	Tailgate Raise Cyl.s 3 in. 76.20 mm			Packing Cycle	20 sec. (approx.)		
Body Roof (80k)	10 ga	3.41 mm	Packer Plate		Lift Cycle	16 sec. (approx.)			
Body Floor (100k)	3/16 in.	4.76 mm	Lower Face 1/4 in. 6.35 mm			Lift Capacity	8000 lbs	3629 kgs	
Hopper Sides (Upper)	<b>11</b> ga	3.04 mm	Upper Face	<b>10</b> ga	3.41 mm	Lift Cylinders	5 in.	127.0 mm	
Hopper Sides (Lower)	3/16 in.	4.76 mm	Guides	6 in.	152.4 mm	Tilt Cylinders	4 in.	101.6 mm	
Hopper Floor (100k)	1/4 in.	6.35 mm	Packer Force		Oil Reservoir	60 gal.			
Hopper Cover	14 ga	1.91 mm	Pack Cyl. Output 118790 lbs 53882 kgs			Hoses	4:1 Burst		
Hopper Cover Cyl. 2-1/2 in.		63.50 mm	Packer Face	16.5 psi 1.2 kgs/cm <sup>2</sup>		Pump	58 GPM	219.51 pm	
Rear Door	10 ga	3.41 mm	Packer (Lower) 49.5 psi 3.5 kgs/cm <sup>2</sup>		w/ Hydraulic Ov	er-speed Control (HOC)			
Hopper Capacity	<b>12</b> yd. <sup>3</sup>	9.2 m³	Pack Cyl. Main Bore	5-1/2 in.	139.7 mm	Primary Pressure	2500 psi	175.8 kgs/cm <sup>2</sup>	

CHASSIS REQUIREMEMENTS

CHASSIS REQUIREMENTS											
	MODEL	CT "CLEAR"		WHEEL BASE (WB)		GAWR FRONT		GAWR REAR		GVW MINIMUM	
	MODEL	in	mm	in	mm	lbs	kgs	lbs	kgs	lbs	kgs
	FPE830C	158-168	4013-4267	178-188	4521-4775	20000	9072	40000	18144	60000	27216
	FPE835C	170-180	4318-4572	190-200	4826-5080	20000	9072	40000	18144	60000	27216
	FPE840C	180-190	4572-4826	200-210	5080-5334	20000	9072	44000	19958	64000	29030

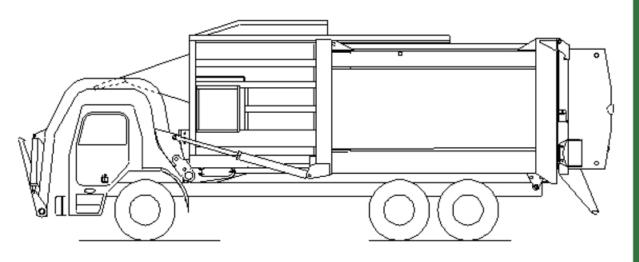

## Pak-Mor Ltd.

P.O. Box 389 **Seguin, TX 78156** Tel 830-303-7256 Fax 830-303-3648

info@pakmor.com www.pakmor.com

## Standard Equipment:

**Automatic Tailgate Locks** Sliding Hydraulic Hopper Cover FMVSS #108 Light Package

**Hopper Access Door** 

25 gal. Hopper Sump w/ Clean-out Doors

**Rear Mounted Splash Guards** 90 gpm Return Line Filtration

Air Cylinder Actuated Hinged Cab Cover

Packer Lockout - To Prevent Dumping Behind Blade

## **Optional Equipment:**

**Logic Controls Auto-Pack Controls LED Light Package Hopper Lights, Strobes** 

Windscreens

80 gal. Washout Tank

Fire Extinguisher w/ Bracket

**Tool Boxes** 

Water Coolers & More...

## Your Authorized Dealer is:

Municipal Equipment Sales, Inc.

Mailing Address: PO Box 1233 Location: 208 Bell Place Woodstock, GA 30188

Local: 770-326-0424 Fax: 770-928-7512 Nationwide Toll Free: **1-800-782-2243** Email: sales@municipalequipment.com Web: www.municipaleguipment.com



